MULTILINE®
bright with light

Rekta 30 SAPP - VDT - LO 500mA - emergency - RAL 07.23025264-9999

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	VDT louvre
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001




Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD
Emergency set	Autonomy 1 hour DALI


Lamp details

Lamptype	LED 4000K
Wattage	5,6W
Gross luminous flux	6390
Luminaire power	37,2W
Number	6
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

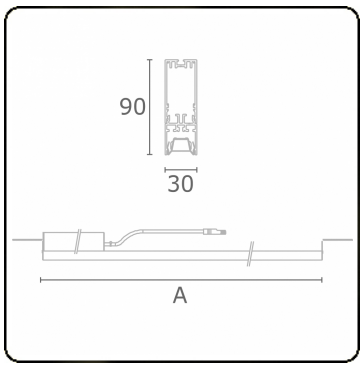

Photometric details

UGR	17,0/18,2
CIE Fluxcode	90 99 100 100 68

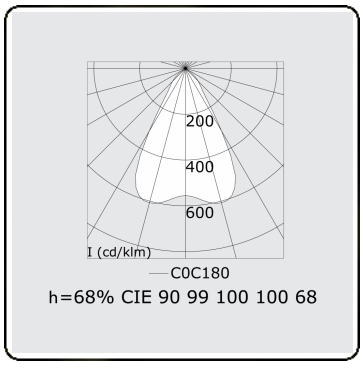

Dimensions

A	1684 mm

Remarks

VDT louvre 500mA DALI dimmable emergency module autonomy 1 hour 2 luminaires

