

Punto - Clear - ND - RAL 9006 / RAL 9006
05.34200023-9006

Fixture details



Mounting	3-circuit track
Light emission	Spotlight
Fitting cover	Glass
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9006 White aluminium
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K 30°
Wattage	20W
Luminaire power	20W
Luminaire luminous flux	1680
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>90

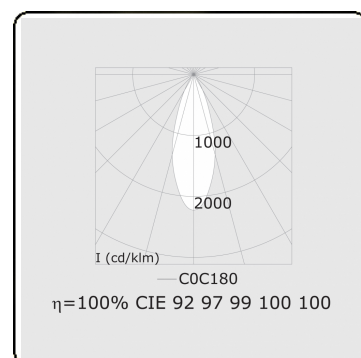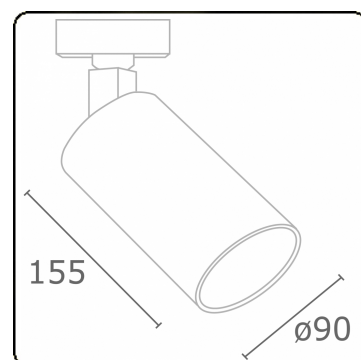

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015