

T-Line 130 - Direct or Indirect - curved cover panel - ANO
06.37204024-0001

Fixture details

| | |
|-----------------|-------------------------|
| Mounting | Wall |
| Light emission | Direct or Indirect |
| Fitting cover | Prismatic diffuser |
| Protection rate | IP 20 |
| Housing | Aluminium/Polycarbonate |
| Finish | anodized finish |
| Certificates | CE, ISO 9001 |

Electric details

| | |
|------------------|------------------------|
| Protection class | I |
| Supply | 230V |
| Control gear box | Current driver DALI/TD |

Lamp details

| | |
|---------------------|------------------|
| Lamptype | LED 4000K |
| Wattage | 3,6W |
| Gross luminous flux | 1340 |
| Luminaire power | 7,9W |
| Number | 2 |
| Lifetime LED module | L80/B10 > 72000h |
| Color tolerance | MacAdam 3 |
| CRI | >80 |

Photometric details



| | |
|-----------------------|-----------------|
| CIE Fluxcode | 70 93 99 100 71 |
| CIE Fluxcode Indirect | 00 00 00 00 71 |

Dimensions

| | |
|---|--------|
| A | 594 mm |
|---|--------|

Remarks

direct or indirect light distribution with curved cover

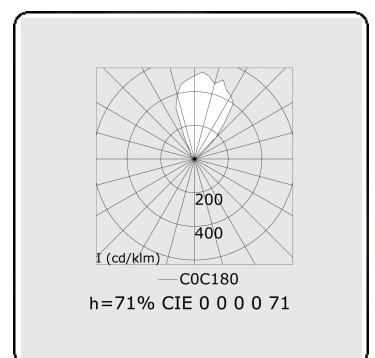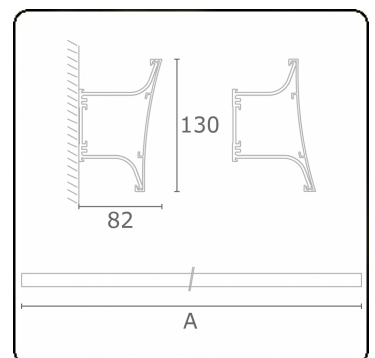

A

Verrijgbaar op aanvraag.

B

Disponible sur demande.

C

Available on request.

D

Auf Anfrage.

E

F

G

WXYZ

kWh/1000h

MULTILINE®

2019/2015