

Biko Direct - satin - HO 325mA - ANO Brass/RAL
04.44004683-0599

Fixture details

Mounting	Pendant
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 3000K
Wattage	7,1W
Gross luminous flux	10760
Luminaire power	62,9W
Number	8
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	50 80 96 100 51

Dimensions

A	2256 mm
---	---------

Remarks

Suspended luminaire - Direct - HO 325mA - satin (flush) - ANO Brass/RAL

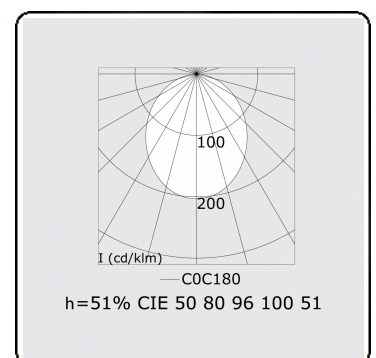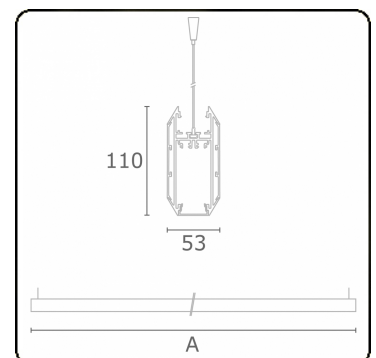

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

A

B

C

D

E

F

G

WXYZ

kWh/1000h

MULTILINE®

2019/2015