

Biko Direct/Indirect - satin - HO 325mA - Wood 1/RAL
04.44100663-0799

Fixture details

Mounting	Pendant
Light emission	Direct-Indirect
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	7,1W
Gross luminous flux	14795
Luminaire power	86,4W
Number	11
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details




UGR	>19
CIE Fluxcode	50 80 96 100 51
CIE Fluxcode Indirect	00 00 00 00 51

Dimensions

A	1696 mm
---	---------

Remarks

Suspended luminaire - Direct/Indirect - HO 325mA - satin (flush) - Wood 1/RAL

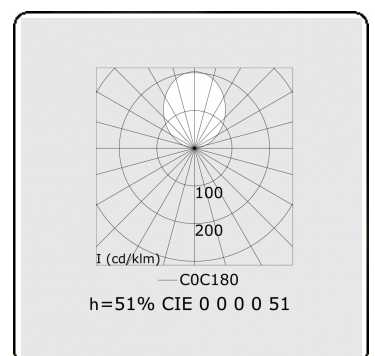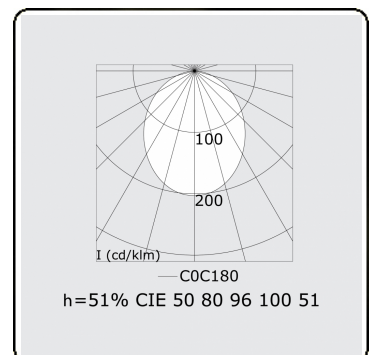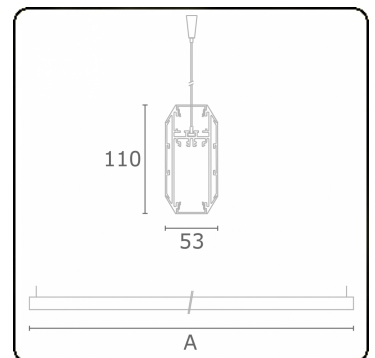

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015