



Score flat Direct/Indirect - satin - HO 325mA - RAL  
04.87100604-9999

#### Fixture details

Mounting	Pendant
Light emission	Direct-Indirect
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001




#### Electric details

Protection class	I
Supply	230V
Control gear box	Current driver


#### Lamp details

Lamptype	LED 4000K
Wattage	7,1W
Gross luminous flux	25650
Luminaire power	141,5W
Number	18
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

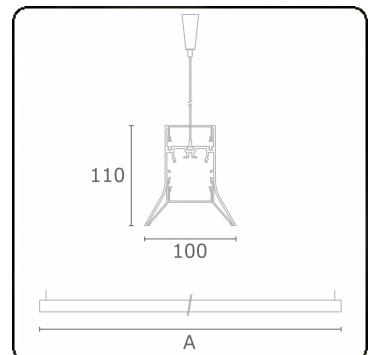

#### Photometric details

UGR	>19
CIE Fluxcode	56 88 98 99 71
CIE Fluxcode Indirect	00 00 00 00 73

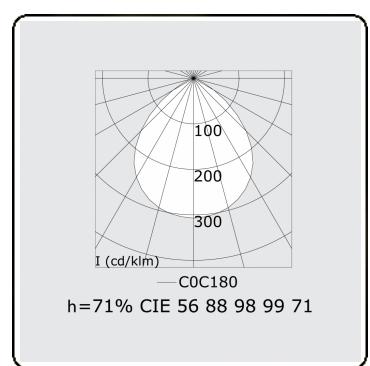

#### Dimensions

A	2824 mm
---	---------

#### Remarks

Suspended luminaire - Direct/Indirect - HO 325mA - satin - RAL

**ENERG**  
A

Verkrijgbaar op aanvraag.



Disponible sur demande.



Available on request.



Auf Anfrage.



**WXYZ**

kWh/1000h

2019/2015

MULTILINE®

