

Tube 70 T1 - clear - HO 325mA - double cable gland
35.90205644-0000

Fixture details

Mounting	Wall
Light emission	Direct
Fitting cover	clear diffuser
Protection rate	IP 65
Housing	Polycarbonate/PMMA
Finish	frosted
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD
Emergency set	Autonomy 1 hour DALI

Lamp details

Lamptype	LED 4000K
Wattage	7,1W
Gross luminous flux	5700
Luminaire power	31,4W
Number	4
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



CIE Fluxcode	44 73 91 88 86
--------------	----------------

Dimensions

A	1200 mm
---	---------

Remarks

Wall luminaire - clear - HO 325mA - double cable gland

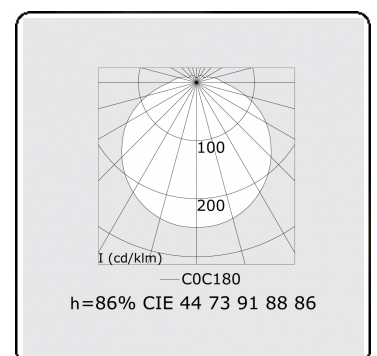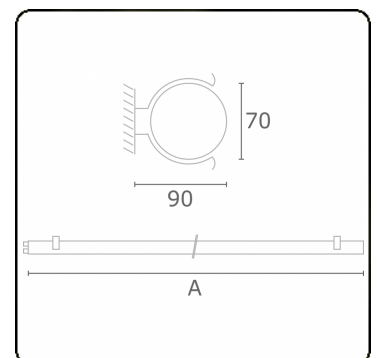




Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

MULTILINE®

2019/2015