

Ro-LED Direct - VDT - HO 325mA - ANO
04.92020684-0001

Fixture details

Mounting	Pendant
Light emission	Direct
Fitting cover	VDT louvre
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 4000K
Wattage	7,1W
Gross luminous flux	11400
Luminaire power	62,9W
Number	8
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	<19
CIE Fluxcode	80 99 100 100 71

Dimensions

A	2250 mm
---	---------

Remarks

Suspended luminaire - Direct - HO 325mA - VDT - ANO

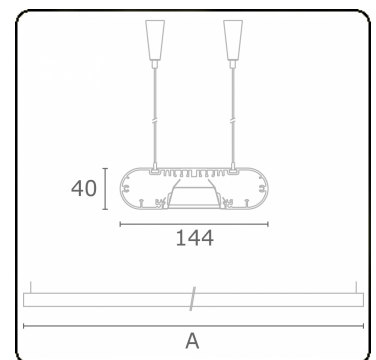




A

Verrijgbaar op aanvraag.

B

Disponible sur demande.

C

Available on request.

D

Auf Anfrage.

E

F

G

WXYZ

kWh/1000h

MULTILINE®

2019/2015