

Rekta 65x130 Direct/Indirect - satin - HO 325mA - RAL
06.94504634-9999

Fixture details

Mounting	Wall
Light emission	Direct-Indirect
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K
Wattage	7,1W
Gross luminous flux	8550
Luminaire power	47,2W
Number	6
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	49 80 96 100 70
CIE Fluxcode Indirect	00 00 00 00 70

Dimensions

A	850 mm
---	--------

Remarks

Wall luminaire - Direct/Indirect - HO 325mA - satin (flush) - RAL

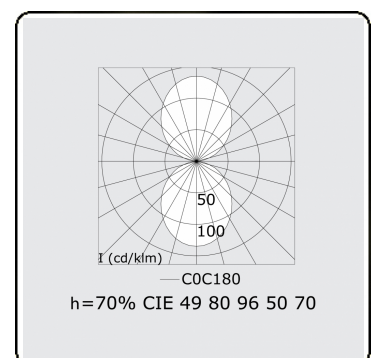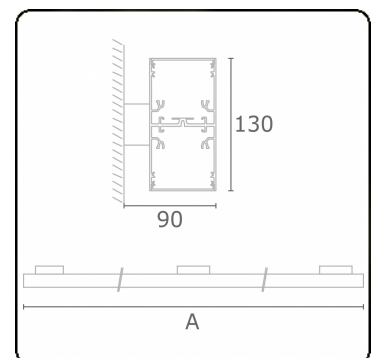

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

MULTILINE®

A

B

C

D

E

F

G

WXYZ

kWh/1000h

2019/2015