

Rekta 65x65 Direct - satin protruding - HO 325mA - ANO
07.94634654-0001

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K
Wattage	7,1W
Gross luminous flux	7125
Luminaire power	39,3W
Number	5
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	49 80 96 99 70

Dimensions

A	1430 mm
---	---------

Remarks

Recessed luminaire (with trim) - Direct - HO 325mA - satin protruding - ANO

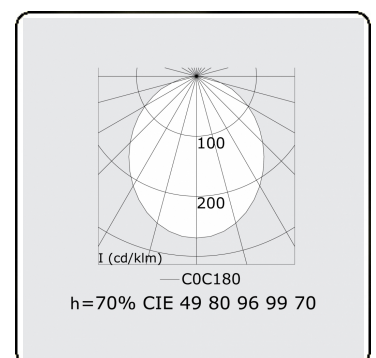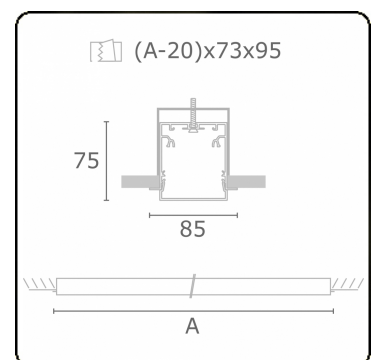




Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

MULTILINE®

2019/2015