

Tube 90 - Recessed - HO 150mA - transit wired - RAL
35.39150524-9999

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium/Polycarbonate
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 4000K
Wattage	3,2W
Gross luminous flux	1350
Luminaire power	7W
Number	2
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


CIE Fluxcode	48 78 94 100 61
--------------	-----------------

Dimensions

A	1050 mm
---	---------

Remarks

Ceiling luminaire - Recessed - HO 150mA - transit wiring - RAL

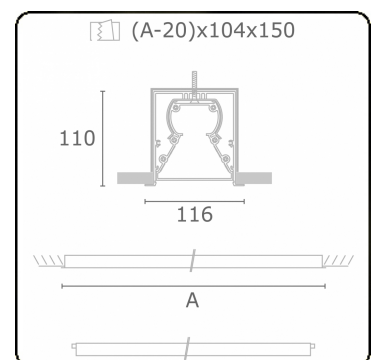




A

Verrijgbaar op aanvraag.

B

Disponible sur demande.

C

Available on request.

D

Auf Anfrage.

E

F

G

WXYZ
kWh/1000h

MULTILINE®

2019/2015