

Tube 90 - Recessed - HO 150mA - standard - ANO
35.39055544-0001

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium/Polycarbonate
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD
Emergency set	Autonomy 1 hour DALI

Lamp details

Lamptype	LED 4000K
Wattage	3,2W
Gross luminous flux	2700
Luminaire power	14,1W
Number	4
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


CIE Fluxcode	48 78 94 100 61
--------------	-----------------

Dimensions

A	1610 mm
---	---------

Remarks

Ceiling luminaire - Recessed - HO 150mA - standard - ANO

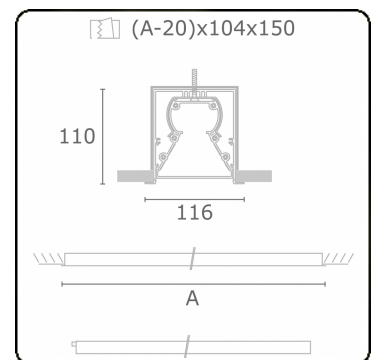




A

B

C

D

E

F

G

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

MULTILINE®

2019/2015