

Sferio Direct - MPO - MO - RAL 9003
04.36012144-9003

Fixture details

Mounting	Pendant
Light emission	Direct
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9003 Signal white
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver 1-10V

Lamp details

Lamptype	LED 4000K
Wattage	52W
Luminaire power	52W
Luminaire luminous flux	7250
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	<19
CIE Fluxcode	60 87 97 100 100


Dimensions

A	600 mm
---	--------

Remarks

Suspended luminaire - Direct - MPO - MO - RAL 9003

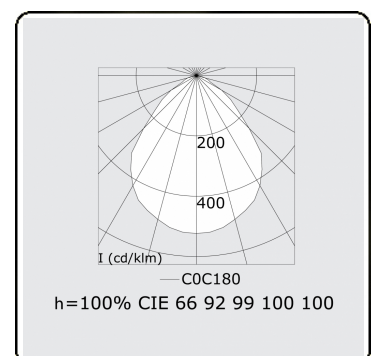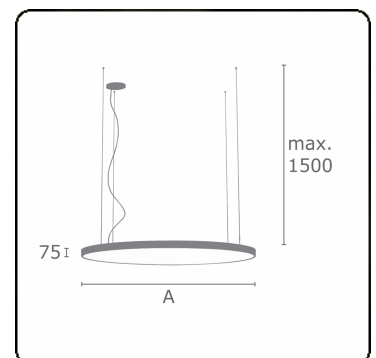


Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015