

Sferio Direct/Indirect - MPO - LO - RAL 9005
05.36110063-9005

Fixture details

Mounting	Ceiling
Light emission	Direct-Indirect
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9005 Jet black
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	157W
Luminaire power	107W
Luminaire luminous flux	17073
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	<19
CIE Fluxcode	60 87 97 56 100

Dimensions

A	1200 mm
---	---------

Remarks

Ceiling luminaire - Direct/Indirect - MPO - LO - RAL 9005

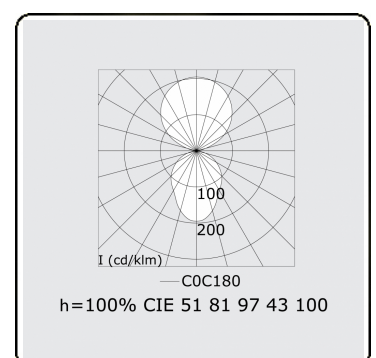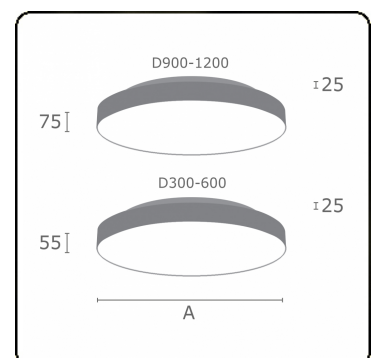

A

Verrijgbaar op aanvraag.

B

Disponible sur demande.

C

D

E

F

G

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

MULTILINE®

2019/2015