

Scorta Direct - satin - MO - RAL 9005
04.86006153-9005

Fixture details

Mounting	Pendant
Light emission	Direct
Fitting cover	Opal diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9005 Jet black
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Power supply touch-dim

Lamp details

Lamptype	LED 3000K
Wattage	67W
Luminaire power	67W
Luminaire luminous flux	7620
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	46 77 94 100 100

Dimensions

A	900 mm
---	--------

Remarks

Suspended luminaire - Direct - satin - MO - RAL 9005

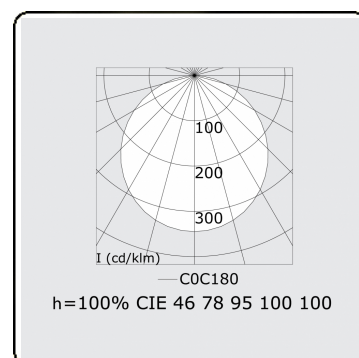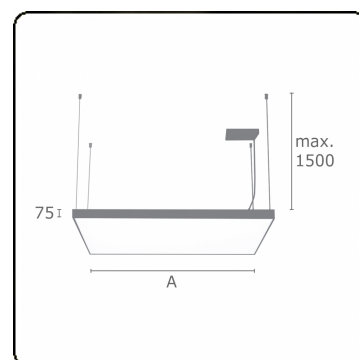

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

MULTILINE®

A

B

C

D

E

F

G

WXYZ

kWh/1000h

2019/2015