

Scorta Direct/Indirect - satin - MO - ANO
04.86100113-0001

Fixture details

Mounting	Pendant
Light emission	Direct-Indirect
Fitting cover	Opal diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	19W
Luminaire power	19W
Luminaire luminous flux	2347
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	46 77 94 55 100

Dimensions

A	330 mm
---	--------

Remarks

Suspended luminaire - Direct/Indirect - satin - MO - ANO

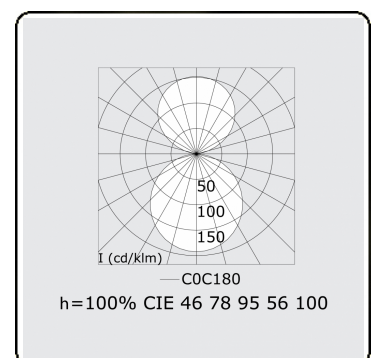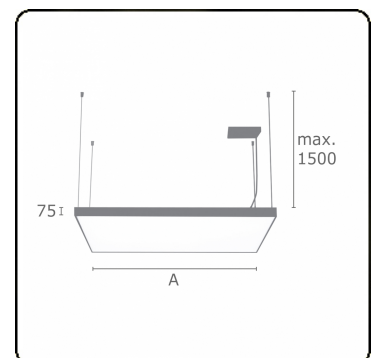




A

Verrijgbaar op aanvraag.

B

Disponible sur demande.

C

Available on request.

D

Auf Anfrage.

E

F

G

WXYZ

kWh/1000h

MULTILINE®

2019/2015