

Scorta Direct - satin - MO - ANO
05.86006163-0001

Fixture details

Mounting	Ceiling
Light emission	Direct
Fitting cover	Opal diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Power supply touch-dim

Lamp details

Lamptype	LED 3000K
Wattage	122W
Luminaire power	122W
Luminaire luminous flux	13576
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	46 78 95 100 100

Dimensions

A	1200 mm
---	---------

Remarks

Ceiling luminaire - Direct - satin - MO - ANO

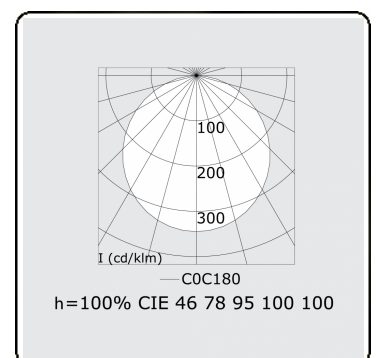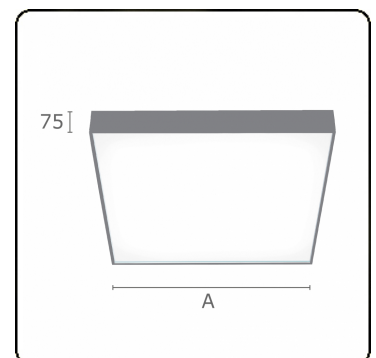

A

B

C

D

E

F

G

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

MULTILINE®

2019/2015