

Scorta Direct - satin - MO - ANO
07.86202144-0001

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Opal diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver 1-10V

Lamp details

Lamptype	LED 4000K
Wattage	40W
Luminaire power	40W
Luminaire luminous flux	5360
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	46 78 95 100 100

Dimensions

A	621 mm
---	--------

Remarks

Recessed luminaire (with trim) - Direct - satin - MO - ANO

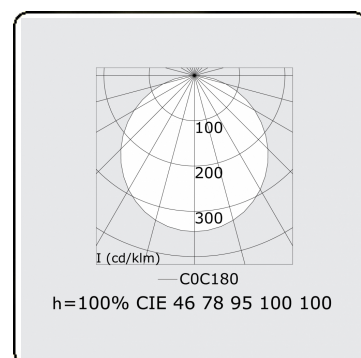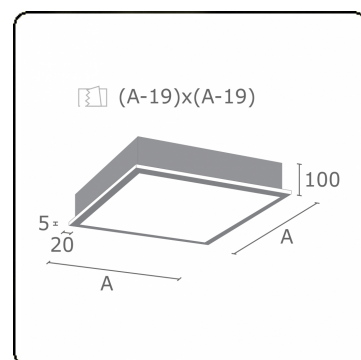

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

A

B


C

D

E

F

G



WXYZ
kWh/1000h

MULTILINE®

2019/2015