
MULTILINE®
bright with light

Scorta Direct - satin - MO - ANO
07.86202144-0001

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Opal diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

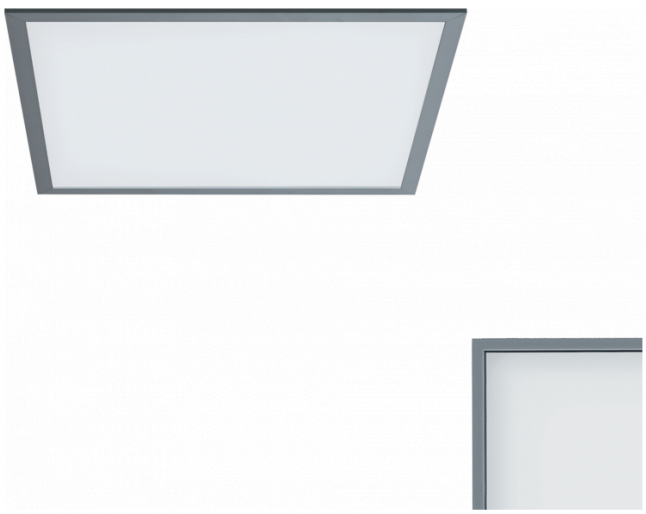


Electric details

Protection class	I
Supply	230V
Control gear box	Current driver 1-10V


Lamp details

Lamptype	LED 4000K
Wattage	40W
Luminaire power	40W
Luminaire luminous flux	5360
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

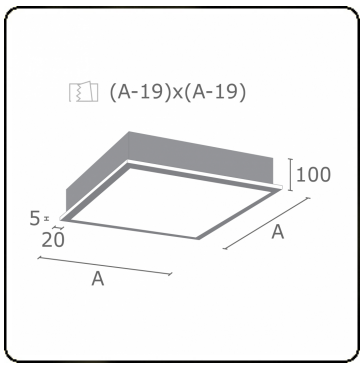

Photometric details

UGR	>19
CIE Fluxcode	46 78 95 100 100

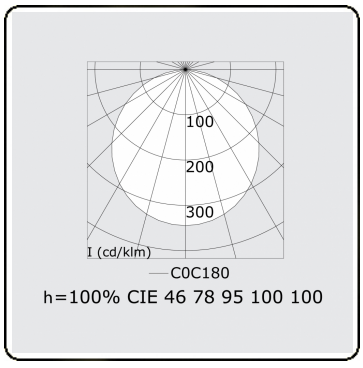

Dimensions

A	621 mm

Remarks

Recessed luminaire (with trim) - Direct - satin - MO - ANO

