MULTILINE®
bright with light

Artres
35.63918-9906



Fixture details


Mounting	Ground
Light emission	Direct
Fitting cover	Glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	50W
Gross luminous flux	4150
Luminaire power	55W
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

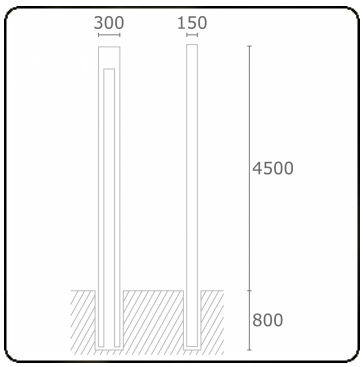

Photometric details

CIE Fluxcode	56 86 97 97 64

Remarks

Artres 4500mm - U-type - including connection door with fuse

