



Kubik T3  
35.06304-9906

#### Fixture details

Mounting	Ground
Light emission	Diffus
Fitting cover	Opal diffuser
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001




#### Electric details

Protection class	I
Supply	230V
Control gear box	Current driver


#### Lamp details

Lamptype	LED 4000K
Wattage	39,2W
Gross luminous flux	8000
Luminaire power	42,8W
Number	1
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

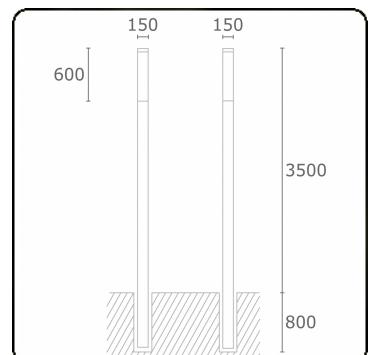

#### Photometric details

CIE Fluxcode	137 37 67 50 57
--------------	-----------------

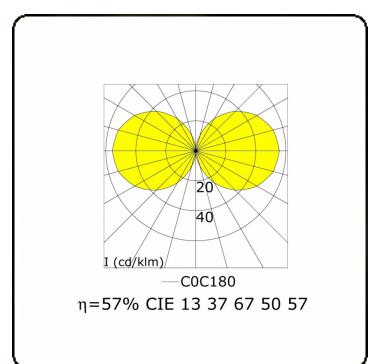

#### Remarks

including connection door with fuse

ENERG<sup>+</sup>

A  
Verkrijgbaar op aanvraag.

C  
Disponible sur demande.

D  
Available on request.

E  
Auf Anfrage.

MULTILINE®



WXYZ  
kWh/1000h

2019/2015