

Rekta 20 - LRLC - 75mA - Emergency - RAL
07.42061124-9999

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Louvre optic - chrome matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver
Emergency set	Autonomy 1 hour

Lamp details

Lamptype	LED 4000K
Wattage	3,0W
Gross luminous flux	1150
Luminaire power	6,6W
Number	2
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	<19
CIE Fluxcode	98 99 100 100 83

Dimensions

A	563 mm
---	--------

Remarks

LRLC optiek - 75mA - Nood - RAL

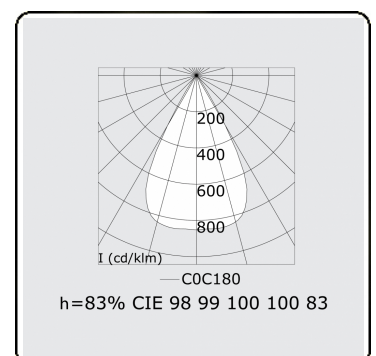

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

A

B

C

D

E

F

G



WXYZ

kWh/1000h

MULTILINE®

2019/2015