

Rekta 20 - LRLW - 75mA - Emergency - RAL
07.42041163-9999

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Louvre optic - white matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver
Emergency set	Autonomy 1 hour

Lamp details

Lamptype	LED 3000K
Wattage	3,0W
Gross luminous flux	3300
Luminaire power	19,8W
Number	6
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	<19
CIE Fluxcode	96 98 99 100 85

Dimensions

A	1683 mm
---	---------

Remarks

LRLW optiek - 75mA - Nood - RAL

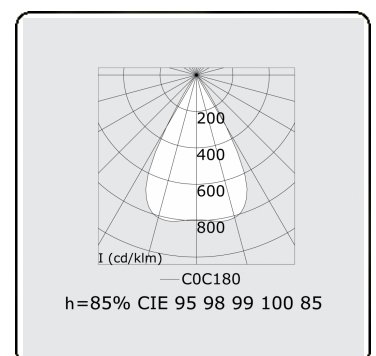

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

MULTILINE®

A

B

C

D

E

F

G

WXYZ

kWh/1000h

2019/2015