

**Rekta 20 - LRLB - 150mA DALI - Emergency - RAL
07.42057444-9999**

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Louvre optic - black matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD
Emergency set	Autonomy 1 hour

Lamp details

Lamptype	LED 4000K
Wattage	6,0W
Gross luminous flux	4400
Luminaire power	26,4W
Number	4
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	<19
CIE Fluxcode	99 99 100 99 81

Dimensions

A	1123 mm
---	---------

Remarks

LRLB optiek - 150mA DALI - Nood - RAL

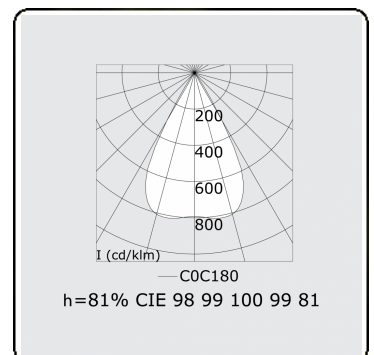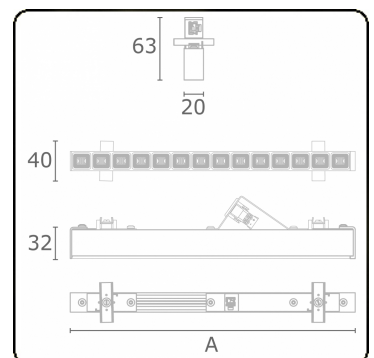




Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

MULTILINE®

2019/2015