

Grip T2 - Direct - LRLB - 100mA - RAL
05.43454244-9999

Fixture details

Mounting	Ceiling
Light emission	Direct
Fitting cover	Louvre optic - black matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K
Wattage	4,0W
Gross luminous flux	3020
Luminaire power	17,6W
Number	4
Lifetime LED module	L80/B10 > 107000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	<19
CIE Fluxcode	99 99 100 99 81

Dimensions

A	1130 mm
B	500 mm

Remarks

Ceiling

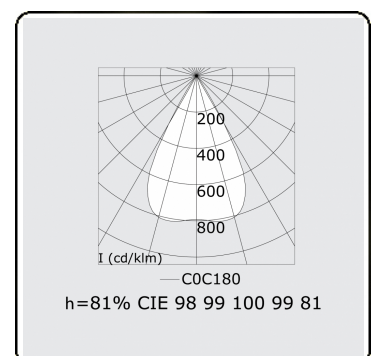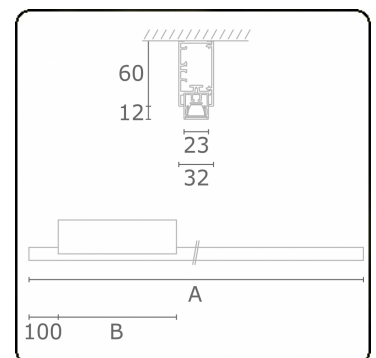

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

EUROPEAN UNION

MULTILINE®

2019/2015