

Rekta 20 - satin - 100mA DALI - DALI Emergency - RAL
07.42005253-9999

Fixture details

| | |
|-----------------|---------------------------|
| Mounting | Ceiling recessed |
| Light emission | Direct |
| Fitting cover | satin diffusor |
| Protection rate | IP 20 |
| Housing | Aluminium |
| Finish | RAL colour at your choice |
| Certificates | CE, ISO 9001 |

Electric details

| | |
|------------------|------------------------|
| Protection class | I |
| Supply | 230V |
| Control gear box | Current driver DALI/TD |
| Emergency set | Autonomy 1 hour DALI |

Lamp details

| | |
|---------------------|-------------------|
| Lamptype | LED 3000K |
| Wattage | 4,0W |
| Gross luminous flux | 3600 |
| Luminaire power | 22,0W |
| Number | 5 |
| Lifetime LED module | L80/B10 > 107000h |
| Color tolerance | MacAdam 3 |
| CRI | >80 |

Photometric details



| | |
|--------------|----------------|
| UGR | >19 |
| CIE Fluxcode | 50 80 96 99 66 |

Dimensions

| | |
|---|---------|
| A | 1403 mm |
|---|---------|

Remarks

frosted

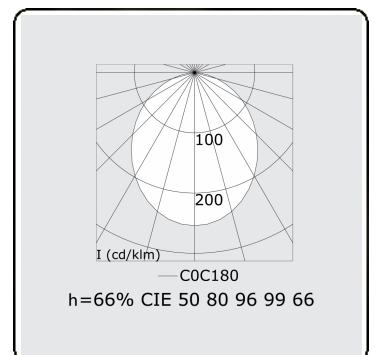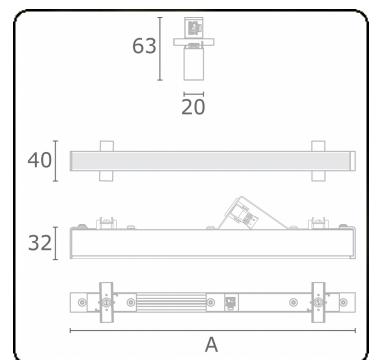

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

MULTILINE®

WXYZ
kWh/1000h

2019/2015