

Hideline 65x65 Direct - VDT - LO 400mA - RAL
07.70440103-9999

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Louvre optic - white matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	4,4W
Gross luminous flux	8200
Luminaire power	48,9W
Number	10
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	<19
CIE Fluxcode	97 99 100 99 85

Dimensions

A	2830 mm
---	---------

Remarks

Recessed luminaire (with trim) - Direct - LO 400mA - VDT louvre - RAL

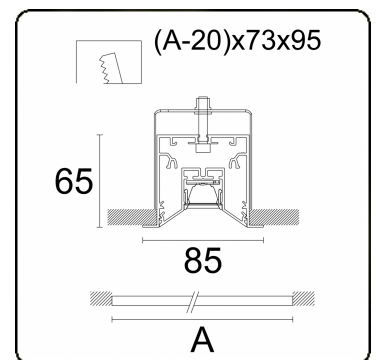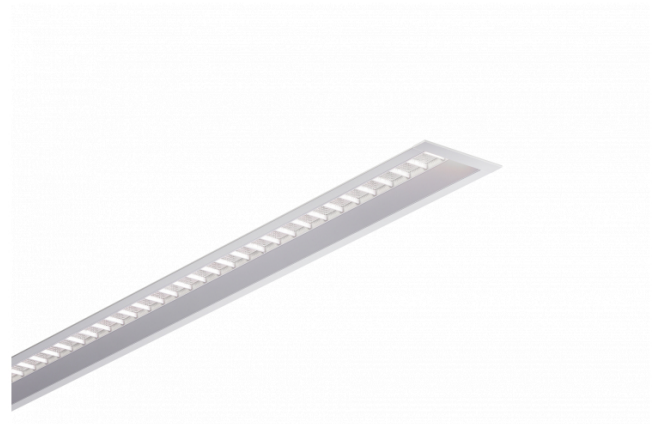

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

2019/2015