

Hideline 40 Direct/Indirect - LRLB - 150mA - RAL
04.71554484-9999

Fixture details

Mounting	Pendant
Light emission	Direct
Fitting cover	Louvre optic - black matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K
Wattage	6,0W
Gross luminous flux	16500
Luminaire power	99,0W
Number	15
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	<19
CIE Fluxcode	99 99 100 99 81
CIE Fluxcode Indirect	00 00 00 00 66


Dimensions

A	2250 mm
---	---------

Remarks

Ceiling

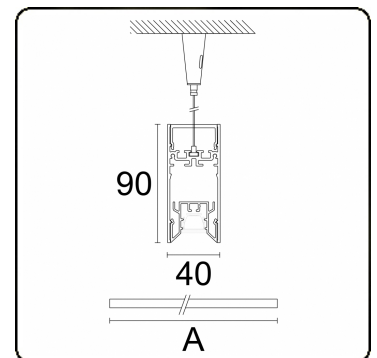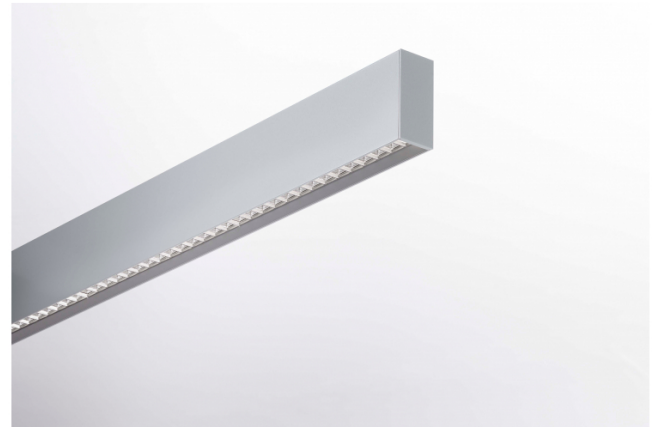


Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015