MULTILINE®
bright with light

Artres
35.63919-7916

Fixture details

Mounting	Ground
Light emission	Direct
Fitting cover	Glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 7016 anthracite textured
Certificates	CE, ISO 9001




Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 4000K
Wattage	50W
Gross luminous flux	4350
Luminaire power	55W
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

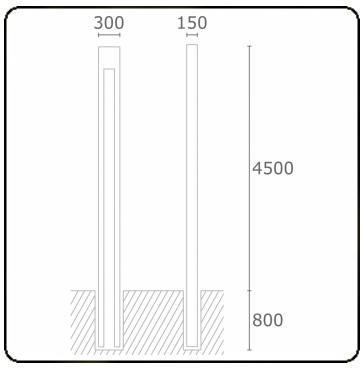

Photometric details

CIE Fluxcode	56 86 97 97 64

Remarks

Artres 4500mm - U-type - including connection door with fuse

